



FPA-640x512-KM InGaAs Imager


NEAR INFRARED (0.9 μm - 1.7 μm) IMAGE SENSOR

FEATURES

- 640 x 512 Array Format
- 28-pin Compact Metal DIP Package
- Embedded Thermoelectric Cooler
- Typical Pixel Operability > 99.5 %
- Quantum Efficiency \geq 70 %

APPLICATIONS

- Near-infrared Imaging
- Imaging Spectroscopy
- Covert Surveillance
- Semiconductor Inspection
- Medical Science and Biology
- Fiberoptic Telecommunication
- Astronomy and Scientific
- Industrial Thermal Imaging
- Moisture Mapping

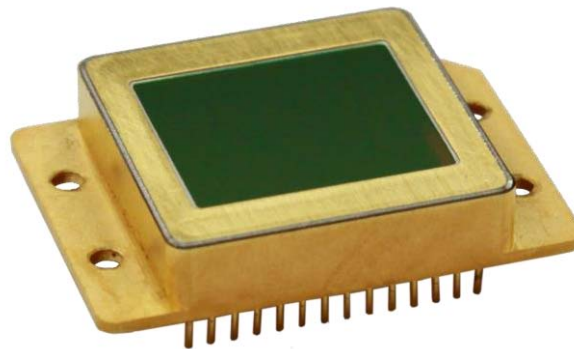

GENERAL DESCRIPTIONS

PARAMETER	VALUE
Sensor Technology	Standard InGaAs/InP
Spectral Range	0.9 μm -1.7 μm
Image Format	640 (H) x 512 (V)
Pixel Size	25 μm x 25 μm (> 99 % Fill Factor)
Image Size	16 mm (H) x 12.8 mm (V)
Package Type	28-pin Compact Metal DIP Package
Weight	16.27 g



FPA CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

PARAMETER	TYPICAL	CONDITIONS
Dark Current	$\leq 0.2 \text{ pA}$	Pixel bias = 0.1 Volt
Quantum Efficiency	$\geq 70 \%$	$\lambda = 1.0 \text{ }\mu\text{m} - 1.6 \text{ }\mu\text{m}$
Fill Factor	$> 99 \%$	
Adjacent pixel crosstalk	$< 1 \%$	
Detectivity	$\geq 5 \times 10^{12} \text{ Jones}^*$	$T_{\text{int}} = 16 \text{ ms}$, High Gain, $\lambda = 1.55 \text{ }\mu\text{m}$
Response Nonuniformity	$\leq 10 \%$	Under 50 % Saturation
Nonlinearity (Max. Deviation)	$\leq 2 \%$	Over 15 % - 85 % Full Well Capacity
Max. Pixel Rate	10 MHz	Max. data rate 5 MHz
Gain	High gain ^{**} : $23.6 \text{ }\mu\text{V}/e^-$ Low gain: $1.26 \text{ }\mu\text{V}/e^-$	
Full Well	High gain ^{**} : 118 ke^- Low gain: 1.9 Me^-	
Pixel Operability ^{***}	$> 99 \%$ (Minimum)	Dark Current $\leq 20 \%$ Full Well Response Nonuniformity $\leq 20 \%$

* 1 Jones = $1 \text{ cm} \times \sqrt{\text{Hz}/\text{W}}$

** Gain and full well under high gain mode may vary from lot to lot.

*** Pixel Operability is defined within the center 636x508 regions


ABSOLUTE MAXIMUM RATINGS

PARAMETER	UNIT	MIN	MAX
Operation Temperature	$^\circ\text{C}$	- 20	85
Storage Temperature	$^\circ\text{C}$	- 40	85
Power Consumption	mW	---	325 ^{****}

**** Without driving the cooler



PACKAGE OUTLINE

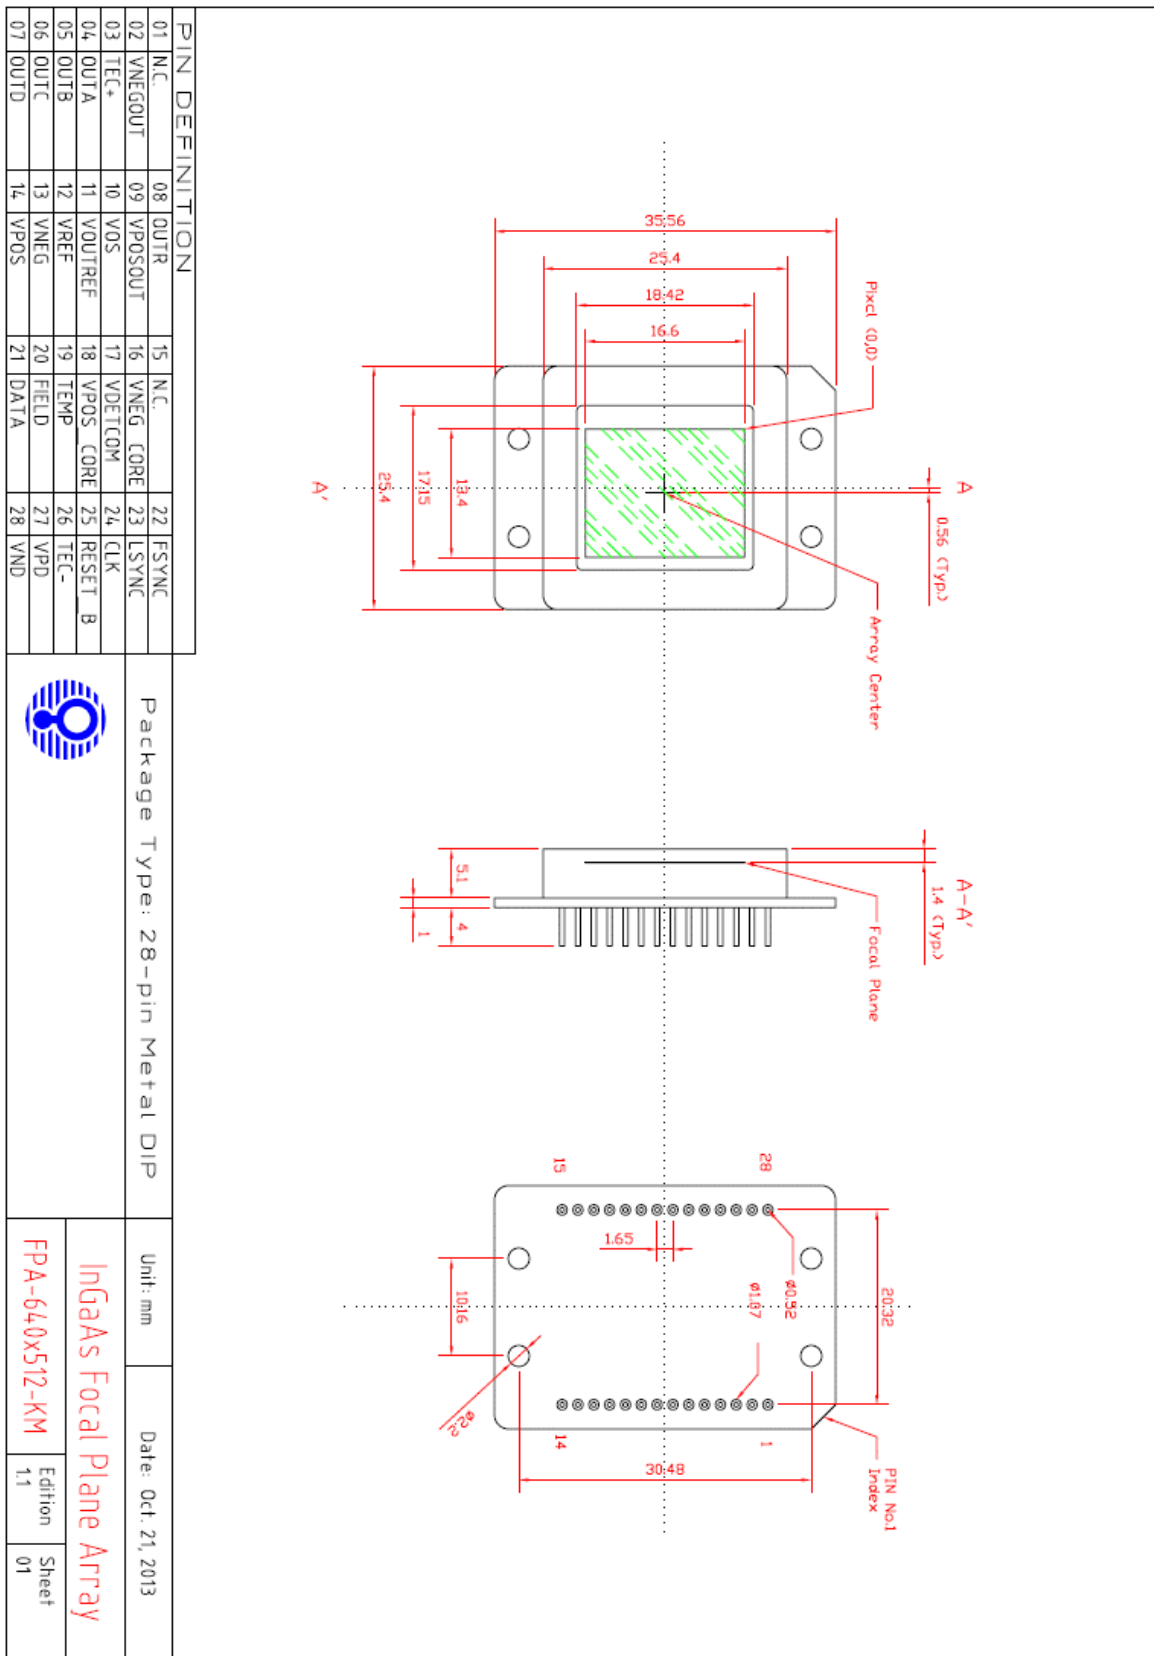

Note : ID number of the imager is printed on the flank of the package



OPERATING CONDITIONS

Bias Input

Pin #	Bias	Voltage	Current	Remark
27	VPD	5.5 V	< 15 mA	Logic positive supply
28	VND	0 V	< 15 mA	Logic negative supply
9	VPOSOUT	5.5 V	< 25 mA	Output driver positive supply
2	VNEGOUT	0 V	< 25 mA	Output driver negative supply
14	VPOS	5.5 V	< 15 mA	Positive analog supply
13	VNEG	0 V	< 15 mA	Negative analog supply and substrate
18	VPOS_CORE	5.5 V	< 80 mA	Positive analog supply
16	VNEG_CORE	0 V	< 80 mA	Negative analog supply
11	VOUTREF	1.6 V	< 1 mA	Output reference level
12	VREF	2.2 V - 3.2 V	< 1 mA	CTIA amplifier reference supply
17	VDETCOM	2.7 V - 5.5 V	< 20 mA	Detector common voltage Detector bias = VREF-VDETCOM*

* VDETCOM lower than VREF will forward bias the detector pixels.

Digital Pattern Input

Pin #	Clocks	Levels	Rise/Fall	Remark
25	RESET_B	0 V - 5.5 V	< 10 ns	Resets digital registers and latches when logic "0" is applied, normally pull up to logic "1"
24	CLK	0 V - 5.5 V	< 10 ns	Master clock Max. Freq. = 5MHz
23	LSYNC	0 V - 5.5 V	< 10 ns	Line sync – controls line readout timing
22	FSYNC	0 V - 5.5 V	< 10 ns	Frame sync - controls frame start and integration time
21	DATA	0 V - 5.5 V	< 10 ns	Data code input - programs chip function registers
20	FIELD	0 V - 5.5 V	< 10 ns	Field sync – controls interlaced field readout



Clocks	Synchronization
FSYNC	Rising and falling when CLK is falling
LSYNC	Rising and falling when CLK is falling
DATA	Rising and falling when CLK is rising
FIELD	Rising and falling when CLK is falling

Video Output

Pin #	Outputs	Levels	Settle	Remark
4	OUTA	2.3 V to 4.7 V*	< 70 ns to 0.1 %	Output A used in single output mode
5	OUTB	2.3 V to 4.7 V*	< 70 ns to 0.1 %	Output A and B used in two output mode
6	OUTC	2.3 V to 4.7 V*	< 70 ns to 0.1 %	Output A, B, C, and D used in four output mode
7	OUTD	2.3 V to 4.7 V*	< 70 ns to 0.1 %	Output A, B, C, and D used in four output mode
8	OUTR	1.6 V	-	Reference for common mode output

* Low gain mode, the swing under high gain mode is 2.3 V ~ 5.1 V



Advanced Function

Pin #	Functions	Voltages	Remark
10	VOS	1.6 V - 5.5 V	Variable Offset/Skimming Control Voltage
19	TEMP	0 V - 5.5 V	On chip temperature monitor 0.74 V at 300 K, Slope = -14.8 mV/10K in 50 – 300 K




THERMOELECTRIC COOLER DATA (Without thermal loading)

ΔT_{\max}	I_{\max}	V_{\max}
> 70 °C	1.80 A	15.40 V



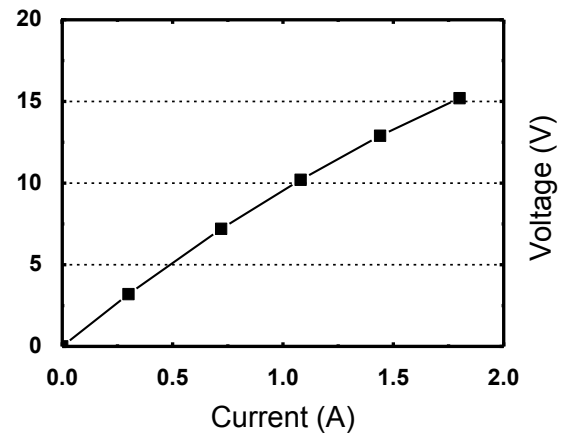
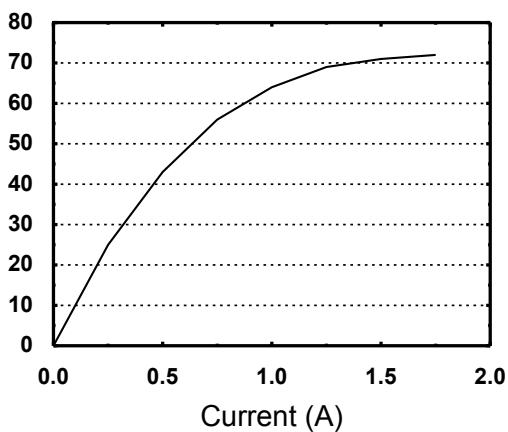


Cooling Performance with sensor loading and operating (Hot side = 22° C)

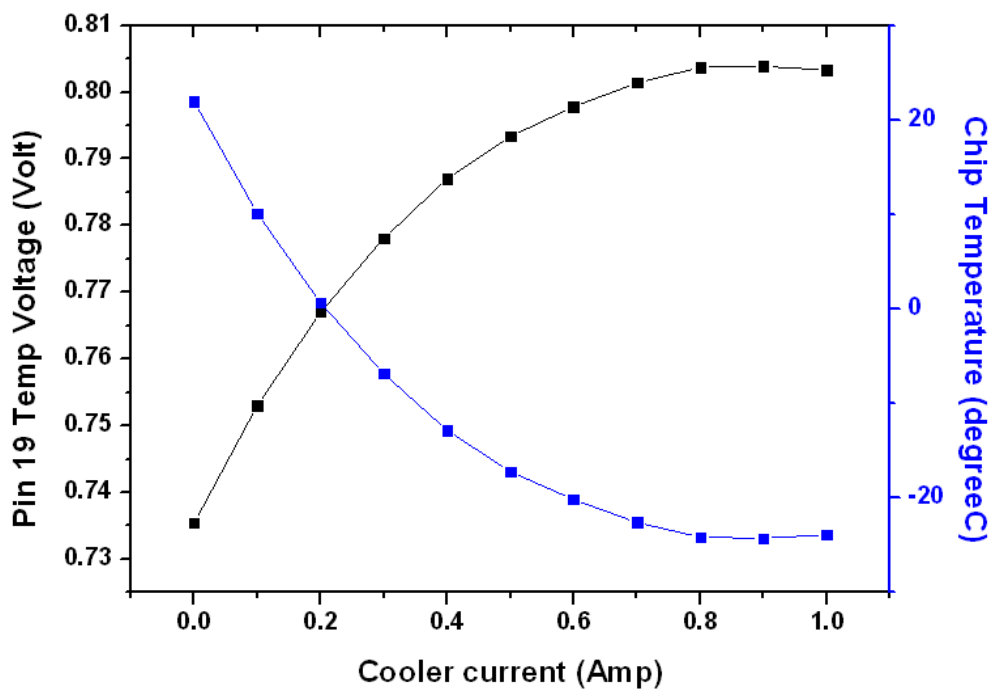




EXAMPLE CURVES

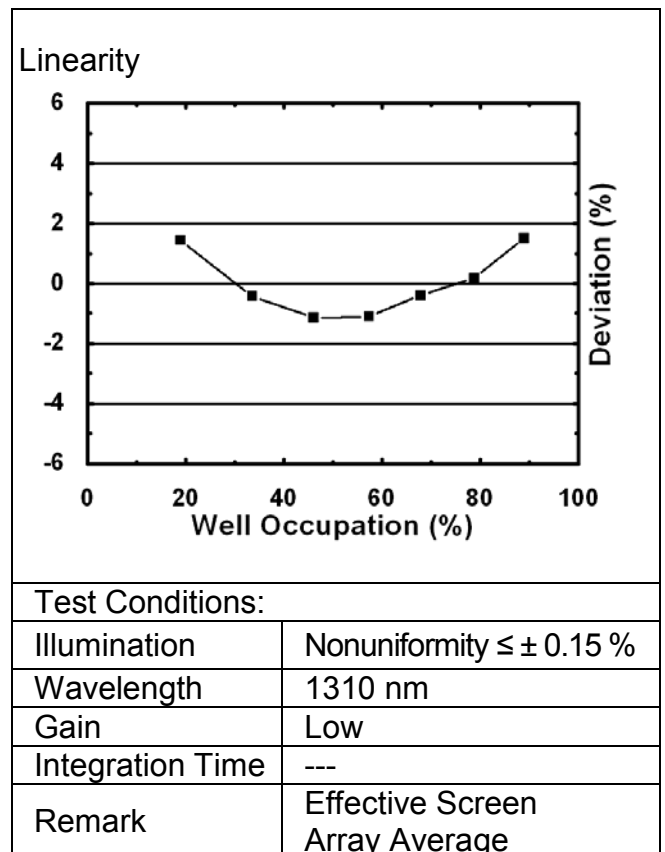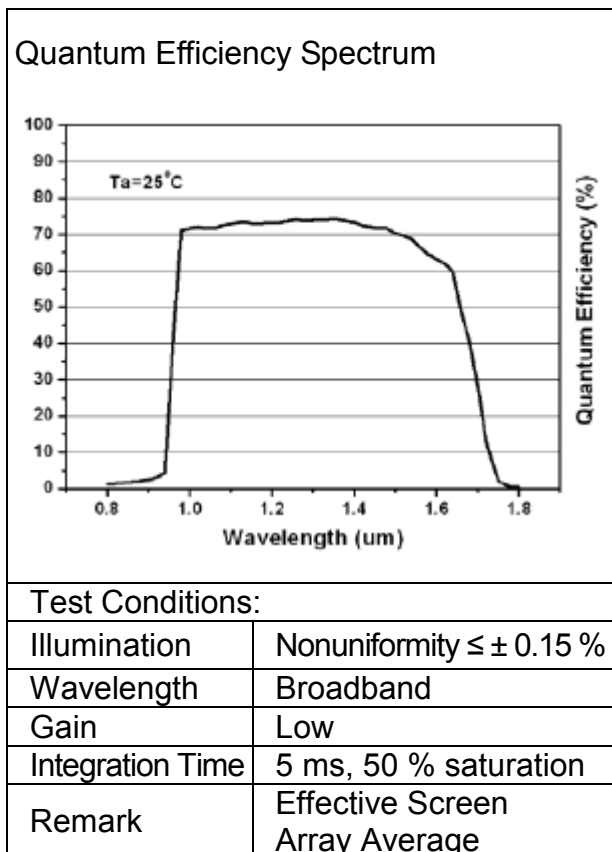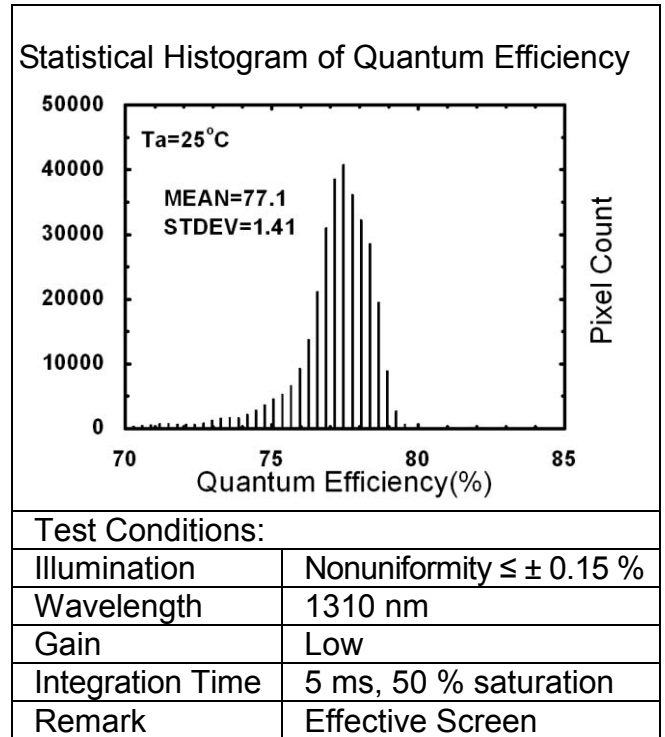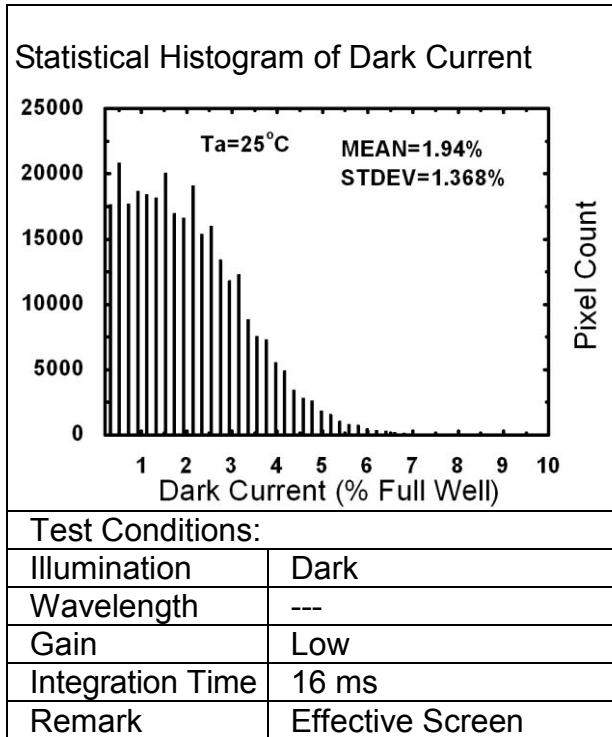




OUTA WAVEFORM (LOW GAIN MODE)

Waveform under dark*

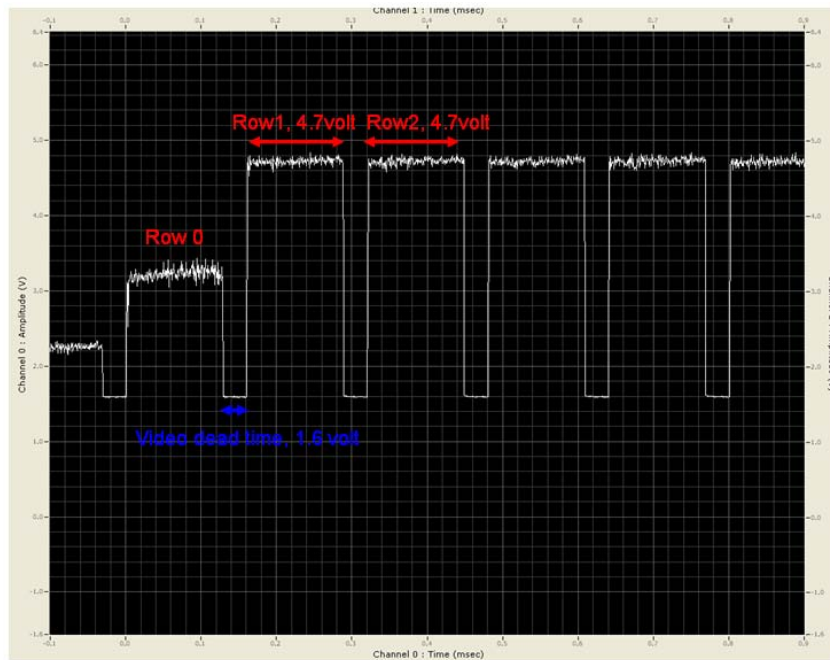


Waveform under saturation

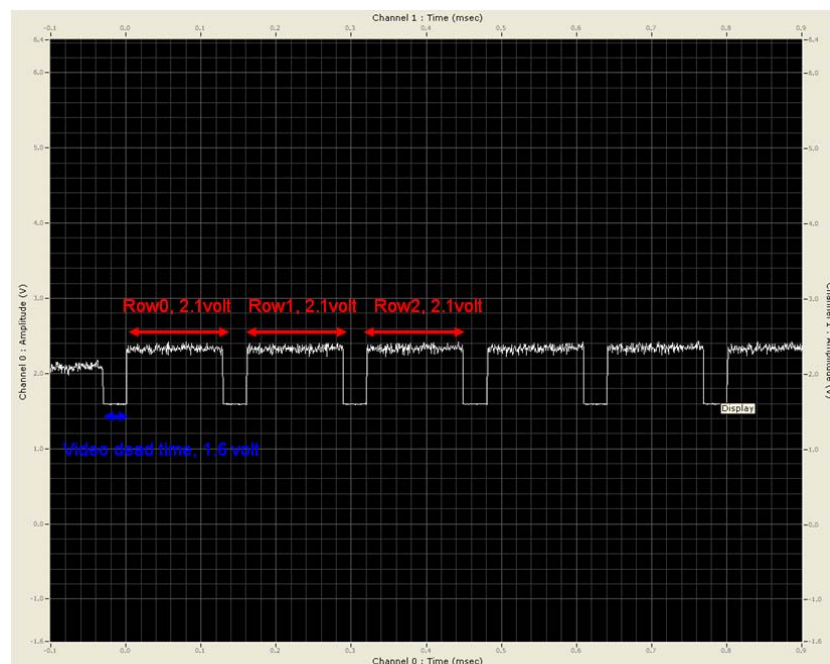

* The dark level under high gain mode is 5.1 volt.



Waveform under near saturation

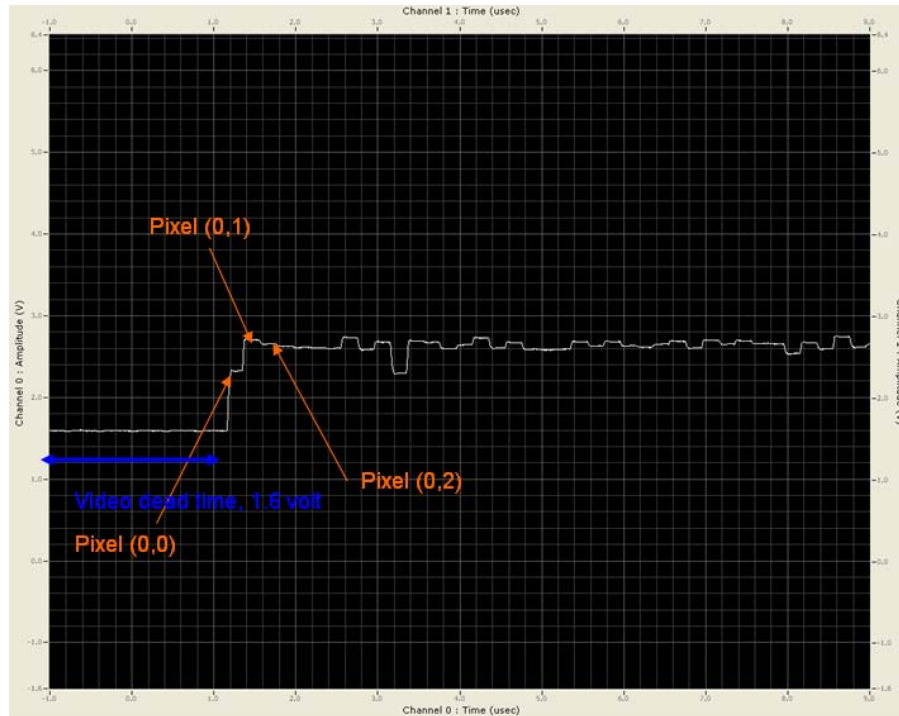

Copyright © 2014 ANDANTA GmbH. The information in this document is subject to change without notice. All rights reserved.